

1

2

3

4

5

6

7

8

9

G

F

E

D

C

B

A

G

F

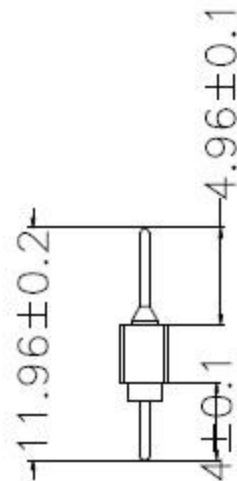
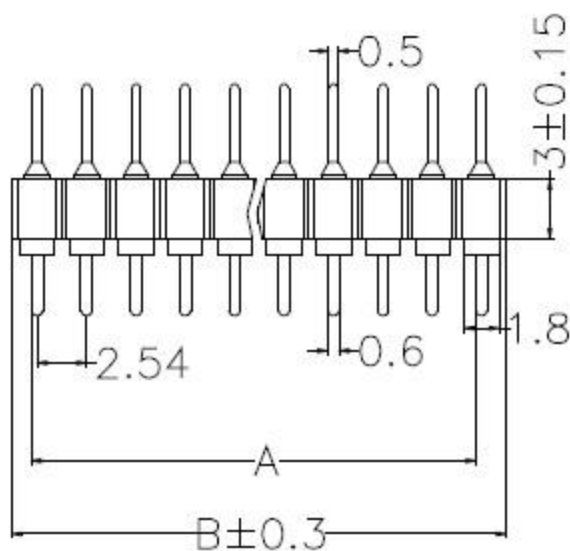
E

D

C

B

A

**SPECIFICATIONS**

Current Rating:3Amps

Insulation Resistance:1000M Ω min

Withstanding Voltage: 1000VAC

Contact Resistance:20m Ω max

Operating Temperature:-40° C to+105° C

Standard:PBT

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Max. Processing Temp:200 °Cfor30-60second  
(220 °Cfor10second)**Code Description****CH-254-FHR-1-XX-S-119-I**

(1) (2) (3) (4) (5) (6) (7)

(1) Pin Spacing: 254=2.54mm

(2) Product Name: FHR=Female Header Round

(3) No. of Row:1=Single;2=Dual Row

(4) No. of Pins Per Row:1-40

(5) ContactType:S=Straight;R=Right/Angle;M=SMT

(6) Height:743=7.43mm;119=11.9mm

(7) I=Import claws;D=Domestic claws



No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B
1	0.00	2.54	11	25.40	27.94	21	50.80	53.35	31	76.20	78.74
2	2.54	5.08	12	27.94	30.48	22	53.35	55.88	32	78.74	81.28
3	5.08	7.62	13	30.48	33.02	23	55.88	58.42	33	81.28	83.82
4	7.62	10.16	14	33.02	35.56	24	58.42	60.96	34	83.82	86.36
5	10.16	12.70	15	35.56	38.10	25	60.96	63.50	35	86.36	88.90
6	12.70	15.24	16	38.10	40.64	26	63.50	66.04	36	88.90	91.44
7	15.24	17.78	17	40.64	43.18	27	66.04	68.58	37	91.44	93.98
8	17.78	20.32	18	43.18	45.72	28	68.58	71.12	38	93.98	96.62
9	20.32	22.86	19	45.72	48.26	29	71.12	73.66	39	96.62	99.06
10	22.86	25.40	20	48.26	50.80	30	73.66	76.20	40	99.06	101.6

UNLESS OTHERWISE SPECIFIED TOLERANCE

X	:±0.3	X°	:±5°
X.X	:±0.2	X.X°	:±1°
X.XX	:±0.2	X.XX°	:±0.5°

DRAWN NAME: CH-254-FHR-1-XX-S-119-I

SIZE	A4	SCALE	N:1	PROUCT	
REV	A	UNIT	mm	PROJECT	
				⊕	PAGE 1/1

CHECKED	L.TU SHING HUI	DATE	05/28	CHECKED		DATE	/
---------	----------------	------	-------	---------	--	------	---

1

2

3

4

5

6

7

8

9