
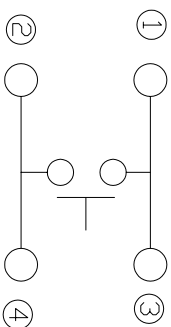
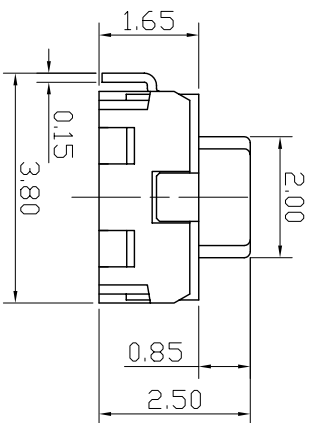


P.C.B LAYOUT

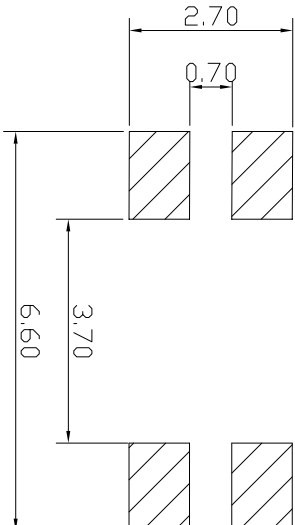

CIRCUIT

Rating	DC12V 50mA
Contact Resistance	500mΩMax.
Insulation Resistance	>100MΩDC100V
Withstand Voltage	AC250V 1min.
Soldering Temper.	230°C Max.
Electrical Life	100,000 cycles
Ambient Temper. Used	-20°C to 70°C
Ambient Humidity Used	<85% RH
Operating Force	160 ⁺⁷⁰ ₋₄₀ gf
Travel	0.3 ^{+0.1} _{-0.2} mm

REVISION	DESCRIPTION	REVISED BY	TOLERANCES X±0.3	ANGLE 1/2°	SCALE	UNIT mm	PART NAME	TS47 SPEC DRAWING	DWG NO
△			DRAWN BY 吳美玉	ERIC	8:1				S0216A
△			CHECKED BY	APPROVED BY	DATE 2004/03/24	PART NO	TS47-25MV160		
△									
△									